




The new VR90s* advanced diagnostic tool is the next generation of the VR90* downhole X-ray diagnostic tool. It features a number of significant technology developments, allowing the VR90s service to meet a greater range of customer needs.

BENEFITS

- Higher temperature rating: Rated to 125°C
- Integrated positioning module: Precise tool placement
- Slimmer outer diameter: Entry into a wider range of wells
- H₂S rated: Compliant with NACE MR0175 / ISO 15156

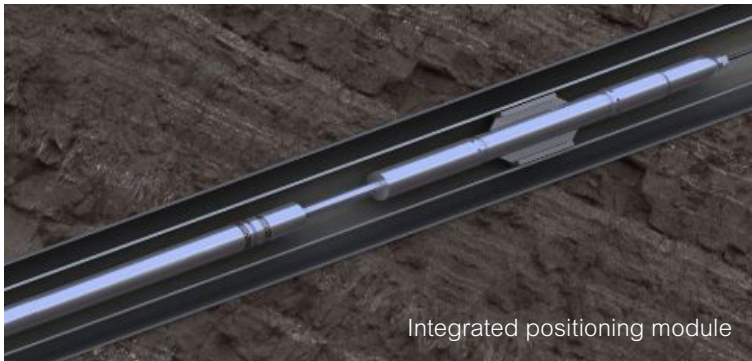

APPLICATIONS

INSPECTION

- SSVs, flapper valves
- Y-tools, ball valves
- Well obstructions
- Milling operations
- Whipstock evaluation

FISHING / RETRIEVING

- Fish inspection
- Plugs, packers, etc.
- Casing / tubing
- Cable fishing
- Dropped objects – identification, position

SPECIFICATIONS

VR90s

Pressure	9,000 psi (620 bar)
Temperature	257 deg F (125 deg C)
OD	3 3/8 in (86 mm)
Field of View	6 in
Sour Well Service	Compliant with NACE MR0175 / ISO 15156
Gamma Ray, CCL	Integrated
3D Accelerometer	Integrated